


MANUAL AND MOTORISED SUGGESTED BULKHEAD/HEADROOM DETAILS

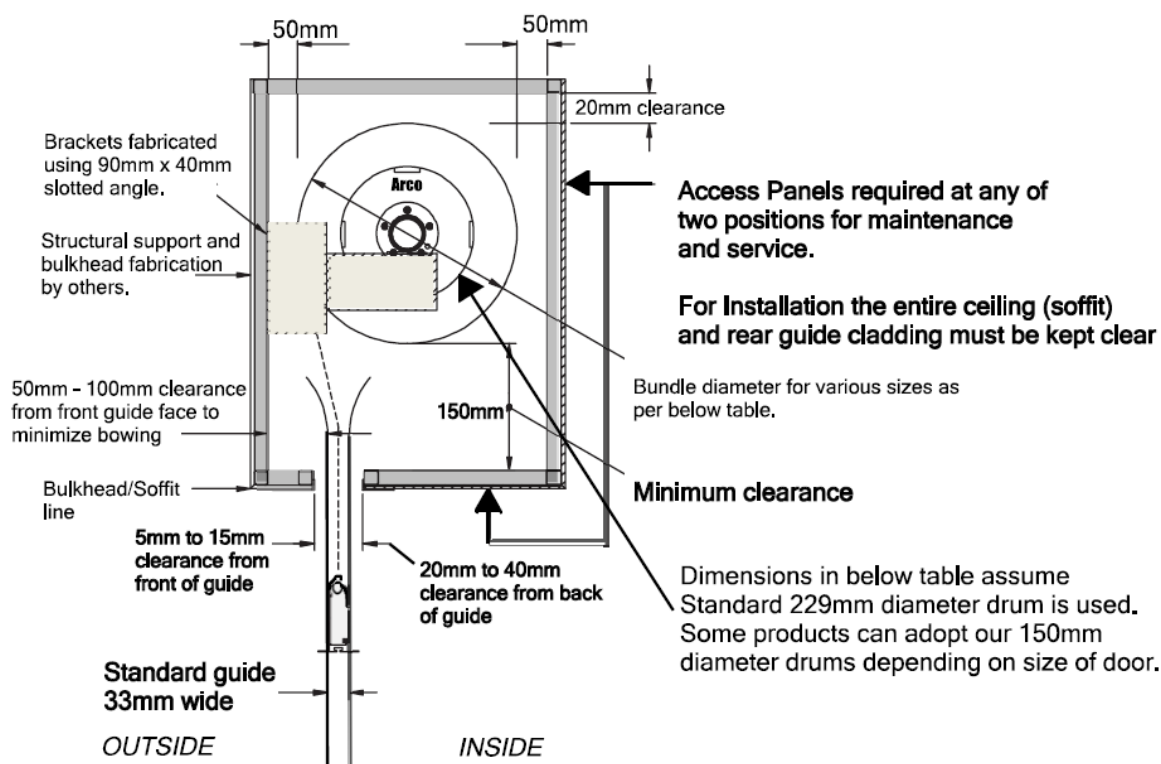

ARCO OVERALL MINIMUM CLEARANCES FOR VARIOUS DROP DOORS												MAXIMUM SIZES (INTERNAL APPLICATIONS ONLY)		
Drop Height	1200	1500	1800	2100	2400	2700	3000	3300	3600	3900	4000	Clearspan	6000	4000
Bundle Dia.	310	320	340	350	360	390	420	430	440	450	460			
Min Total Horizontal	410	430	440	450	480	530	580	610	640	670	700	Series 2	6000	4000
Min Total Vertical	480	490	510	520	530	560	590	600	610	620	630	Slimline	4000	3000

NOTE

Arco roller shutters are to be installed on structure supplied by others (shop fitter / builder).
Such as RHS posts, timber columns and masonry.

Height dimensions are Aperture height. (From bulkhead or soffit line to finished floor level).

Arco Commercial Systems continually set out to improve its products through research and development and reserves the right to make changes to specifications without notice.



ALUMINIUM SHUTTERS

TECH SHEET A1