





## Aluminium Shutter

Designed for strong functional security and peace of mind, the ARCO Commercial Aluminium Shutter offers exceptional protection, with aesthetic appeal.

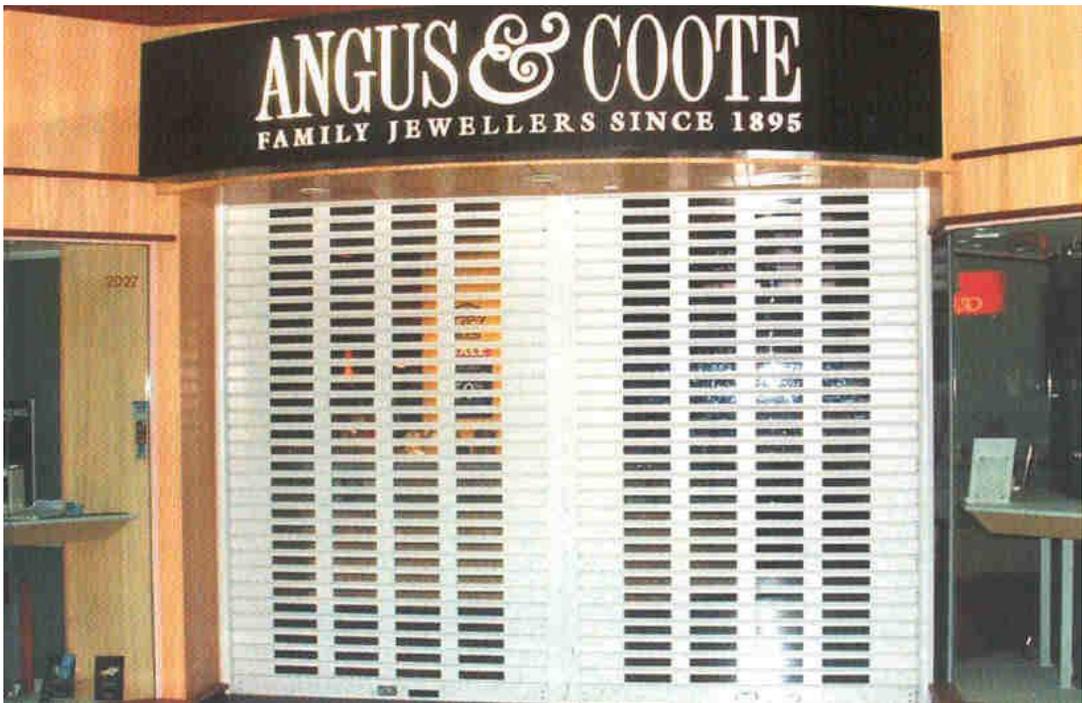

- \* Shopping Centres, high security areas
- \* Custom built
- \* Block-out design OR Slotting design to maintain airflow and visibility
- \* Motorised or Manual
- \* ARCO service/maintenance contracts available
- \* DEEWR Code Compliant
- \* Aust Standards

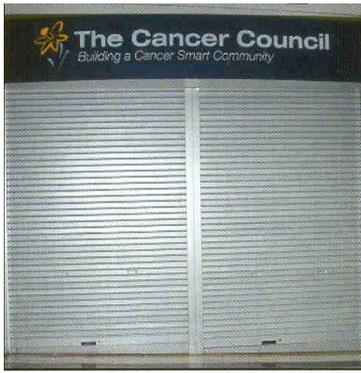

## Features

Designed for maximum security the Aluminium Roller Shutter features a large range of options. The shutter features an extended aluminium slat with a bevelled external face for aesthetic appeal. This is available in part or full slotted with or without dust proof infills that assist in airflow and visibility.

## Specifications

The curtain is as the above details with a face depth of 75mm x 1.5mm, Nylon end clips shall be fitted to alternate slats to prevent lateral movement and provide smooth operation free from lubrication. Optional slotting of 100 x 25mm are available to any number of slats. Vision panels of clear acrylic can be fitted to the slotted slats providing a dust seal.

### Side Guide

50mm x 33mm extruded aluminium with false back for concealing fixings. Optional Nylofelt Buffer available.

### Locking

Can be centrally mounted, two way mortice Key Lock or sliding shoot bolt locking mounted within the bottom rail. Optional waist high locking is also available.

### Bottom Rail

90mm x 48mm extruded aluminium section incorporating locking device and concealed locking rods and optional PVC buffer.

### Brackets

Manufactured from 90mm x 40mm mild steel.

### Roller Drum

Manufactured from 150mm or 229mm spiral ducted tube attached to self lubrication drum wheels and bearings rotating on a 34mm steel shaft. The shaft shall be fitted with helical springs designed to counterbalance the curtain weight throughout its operation. The drum shall be designed to give minimum deflection over the span.

### Mullions


Are two pieces of extruded aluminium section that can be set to any angle and used for wide openings and multiple door installations. Mullions are 'lift out type' with shoot bolts to base. Special wide mullions fabricated from aluminium sheet may be used when two grilles meet at an angle & no room exists for stacking.

### Operation

Designed for manual hand operation as standard, chain and motorisation is optional

### Finish

Available in anodised and powder coated finish

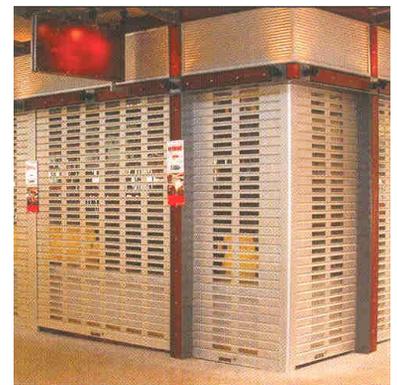

29-31 Macbeth Street, Braeside, Victoria  
Phone: 03 9587 3616 Fax: 03 9587 3670  
Email: [sales@arco.com.au](mailto:sales@arco.com.au) [quotes@arco.com.au](mailto:quotes@arco.com.au)  
Website: [www.arco.com.au](http://www.arco.com.au)