




Polycarbonate Shutter

The Polycarbonate Shutter is a popular design for commercial applications offering security together with style and strength. Your merchandise can always be safely on display taking advantage of every marketing opportunity.

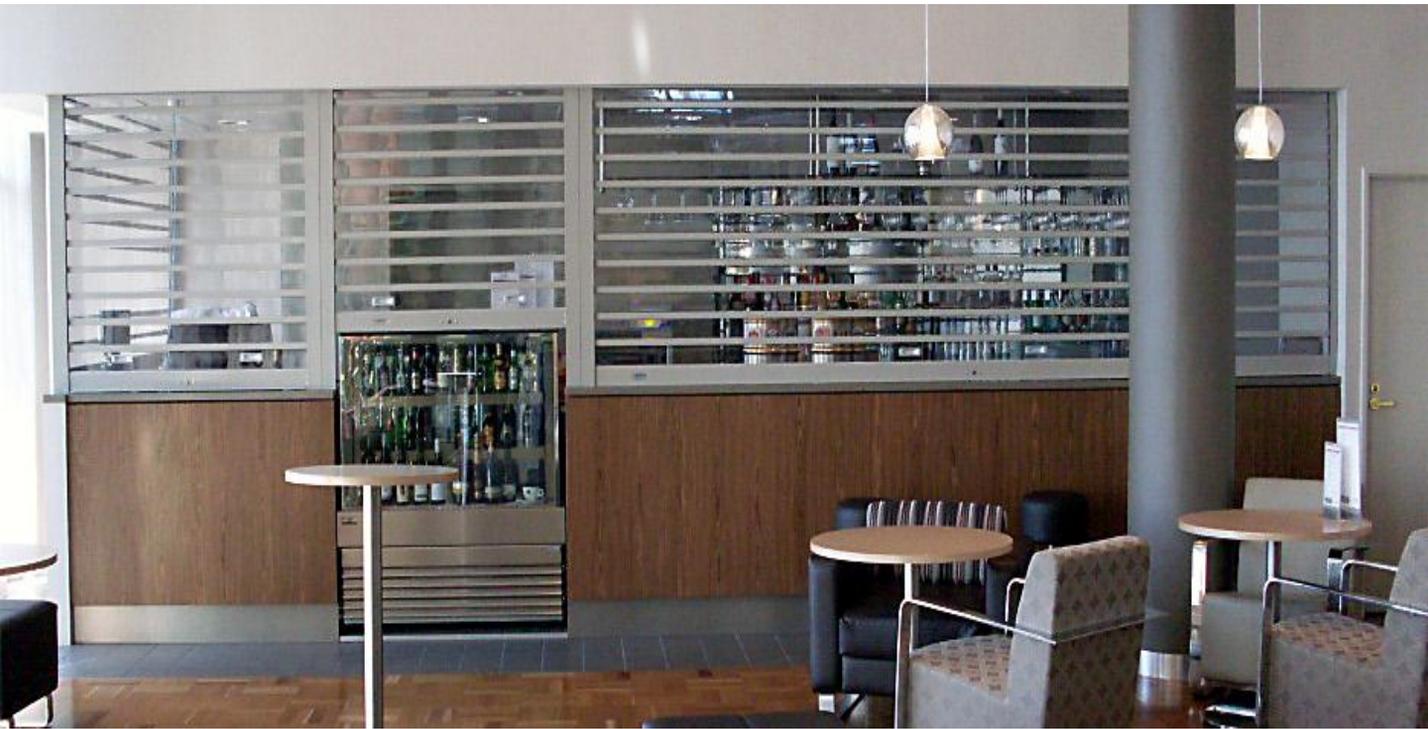

- * Shopping Centres, high security areas, counter tops
- * Custom built
- * Slotting design available to maintain airflow and visibility
- * Motorised or Manual
- * ARCO service/maintenance contracts available
- * DEEWR Code Compliant
- * Aust Standards



Curtain

Constructed of clear polycarbonate extrusions having a depth of 100mm interlocking with symmetrical aluminium extruded members of 30mm to form a continuous hinge. Each aluminium member is fitted with moulded end clips to prevent lateral movement and provide smooth operation within the side guides.

Side Guide

50mm x 33mm extruded aluminium with false back for concealing fixings. Optional Nylofelt Buffer available.

Locking

Can be centrally mounted, two way mortice Key Lock or sliding shoot bolt locking mounted within the bottom rail.

Bottom Rail

90mm x 48mm extruded aluminium section incorporating locking device and concealed locking rods and optional PVC buffer.

Brackets

Manufactured from 90mm x 40mm mild steel.

Roller Drum

Manufactured from 229mm spiral ducted tube attached to self lubrication drum wheels and bearings rotating on a 34mm steel shaft. The shaft is fitted with helical springs designed to counterbalance the curtain weight throughout its operation. The drum is designed to give minimum deflection over the span.

Mullions

Two pieces of extruded aluminium section that can be set to any angle and used for wide openings and multiple door installations. Mullions are 'lift out type' with shoot bolts to base. Special wide mullions fabricated from aluminium sheet are used when two grilles meet at an angle & no room exists for stacking.

Operation

Designed for manual hand operation as standard, chain and motorisation is optional

Finish

Available in anodised and powder coated finish



29-31 Macbeth Street, Braeside, Victoria
Phone: 03 9587 3616 Fax: 03 9587 3670
Email: sales@arco.com.au quotes@arco.com.au
Website: www.arco.com.au